


The SSVC2V7 is a unique 70V Speaker Selector featuring...

2 independent Zones each controlled by a 100Watt 70V Mono Volume Control featuring a Rotary style Knob. Each zone has On/Off switch as well. The unit has a single 2 conductor input and direct pass thru allowing to stack additional SSVC2V7 Speaker selectors only limited by your application. Standard 70V rules apply to the number of speakers used per zone, matching the available power from the 70V amplifier

Note #1: The On/Off switch is supply so you can turn off each zone completely not just depend on the Volume Control to turn so the sound down to inaudible levels. The knob would need to be turned all the way counterclockwise for full off

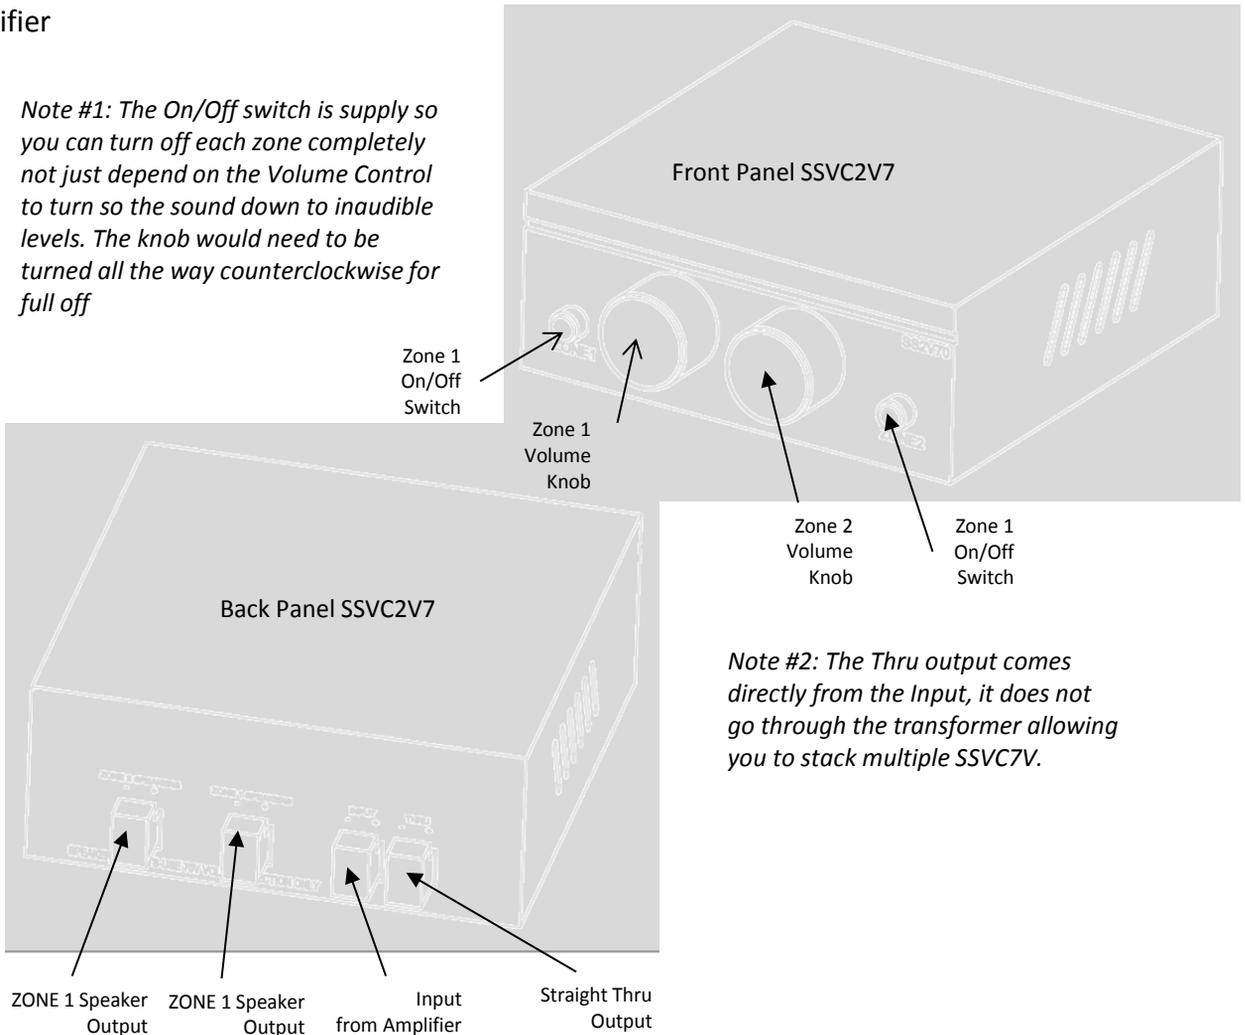


Note #2: The Thru output comes directly from the Input, it does not go through the transformer allowing you to stack multiple SSVC7V.

Specifications

- Power Handling: 100 Watts Per Channel/Zone Mono Single Channel
- Frequency Response: 20Hz-22KHz (+0 dB, -0 dB)
- Selector Type: Noise-Free, front access On/Off Pushbutton and Rotary Knob
- Steps: 33 dB, 10 steps plus full of (step 11)f
- Connection Type: Removable Input/output Connectors
- Wire Size Acceptance: 16 Gauge 2 Conductor,
- Amplifier Protection: 70V Mono only No Impedance Protection Needed



New SSV2V7; 2 Zone, 70V Mono Speaker Selector

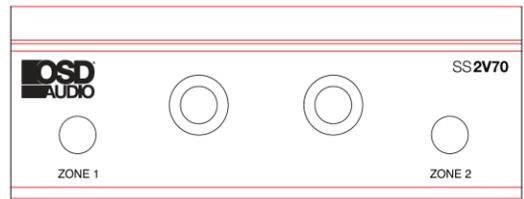

Features and Specifications

DECORA style high-quality auto transformer provides advantages of excellent frequency response, low insertion loss and reliable performance for volume control applications in 25 and 70 volt systems. Attenuation is accomplished in ten make before break steps plus positive off position (no stop between maximum and off position to prevent switch damage). The Attenuator features removable input/output terminal blocks, Two in, two out and two optional for through output for daisy chain option. An attractive alternative to Commercial series attenuators mounts into most single gang E.O boxes. UL Listed White, Almond and Ivory Plastic Plates with Matching Skirted Knobs in DECORA® Style

Power Rating:

The Internal Volume Controls (2) are rated at 100W so the speaker(s) connected to it needs the transformer setting to be equal to or less than the rated watts of each MVC. You can have multiple speakers connected to one MVC but total wattage must 80% or less than the rated Wattage of the each of the internal 100 Watt Volume Controls.

Internal Volume

Control Specs:

10 Step, 33dB

Plus Full Off

STEP	ATTENUATION	
	Full Volume	0dB
10	Full Volume	0dB
9	3dB	minus 3dB
8	3dB	minus 6dB
7	3dB	minus 9dB
6	3dB	minus 12dB
5	3dB	minus 15dB
4	3dB	minus 18dB
3	3dB	minus 21dB
2	6dB	minus 27dB
1	6dB	minus 33dB
0	0dB	Speaker off

Picking the right Distribution Amplifier:

To start with the Amplifier must have a 70Volt output. It must have an output power rating equal to or greater than the total wattage of the system once you have calculated what each speaker should be set to and the total sum of those settings. If you had four speakers at 5 watts each (20 total) and one speaker set to 10 watts (20 + 10 = 30) your amplifier must be rated at least 30 watts minimum. If you had five speakers at 10 watts each (50 total) and another 5 five speakers at 5 watts each (25 + 50 = 75) you would need a amplifier rated at a minimum 75 watts.

Some companies recommend the total should be closer to 80% of the minimum rating of the amplifier. It is also a good idea to install an amplifier with more than enough power in case you want to add more speakers later.

Key Point: *The Power rating of the amplifier is determined by the transformer settings, not the attenuator Rating, The rated power of the Attenuator is based upon the minimum setting of the transformer taps which have to be equal to or less than the rated wattage of the respective MVC Attenuator*

OSD Audio Limited Warranty

OSD Audio will repair or replace any defect it in material or workmanship which occurs during normal use of this product with new or rebuilt parts free of charge in the US for five years from date of original purchase. This warranty does not cover damages in shipment, failure caused by other products not supplied by OSD Audio or failures due to accident, misuse, or alteration of the equipment. This warranty is extended only to the original purchaser and a purchase receipt, invoice or other proof of original date will be required before warranty repairs are provided

Mail in service can be obtained during period by emailing RMA@osdaudio.com. A return authorization number must be obtained in advance and be marked on the outside of the shipping carton.

This warranty gives you specific legal rights and may have other rights (which vary from state to state). If a problem with this product develops during or after the warranty period please contact OSD Audio or your dealer